

Product-Category Rules (PCR)  
for Preparing an Environmental Product  
Declaration (EPD) for  
LED Luminaries for Road and Street Lighting  
PCR 2017:1.0

Delta Electronics, Inc.

Version 1.0  
2017-11-30

# Table of Contents

1. General information .....	3
2. Company and product description .....	3
2.1 Product group functions.....	4
2.2 Product components.....	4
2.3 Product technical description.....	5
2.4 Product lifetime.....	5
3. List of materials and chemical substances .....	5
4. Declared unit or functional unit .....	6
5. System boundaries .....	6
5.1 Specification of different boundary settings .....	8
6. Cut-off rules .....	10
7. Allocation rules .....	10
8. Units .....	11
9. Calculation rules and data quality requirements .....	12
10. Parameters to be declared in the EPD .....	14
11. Recycling information.....	17
12. Other environmental information (Optional).....	17
13. Information about the certification.....	18
14. References .....	19
Appendix I – Generic Data Sources to Refer to.....	20
Appendix II – Reporting Format for the EPD .....	21
Appendix III Abbreviations .....	24

## **1. General information**

This document is intended to be used as the product category rules (PCR) for the manufacturing of LED luminaries for road and street lighting (“product”) globally. This PCR covers products with the Central Product Classification Code (CPC Code) of 46539, and Harmonized System (HS) Code of 9405.40.9000 (other electric lamps and lighting fittings). The requirements specified in this PCR are intended to be used for EPDs certified in accordance with the ISO 14025 standard. This document shall be valid until November 30, 2020.

This PCR was first drafted by the Delta Electronics, Inc. Representatives from major Taiwanese manufacturers of similar products and stakeholders were then invited by the Taiwan Lighting Fixture Export Association to the open consultation meeting held on October 20, 2017, to participate in the discussion and review of the draft PCR. The Environment and Development Foundation (EDF) subsequently reviewed and approved this PCR.

For further information and comments concerning this PCR, please contact: Delta Electronics, Inc. Jason Chang Manager (Tel: +886-3-452-6107 #3360; Fax: +886-3-452-7314; E-mail: [jason.chang@deltaww.com](mailto:jason.chang@deltaww.com)).

## **2. Company and product description**

The EPD shall include information about the manufacturing company/organization. The information may include manufacturing process related information, and environmental management related information, such as the environmental management system information. The information may also include special issues, which the company/organization would like to emphasize, such as the products meeting certain environmental criteria, or environmental safety, and health related information.

This PCR covers the whole life cycle stages of the LED luminaries for road and street lighting, and is applicable to the Business-to-Business (B2B) and Business-to-Government (B2G) communications. During the inventory of product related environmental impacts, the scope of inventory shall also cover the raw materials and packaging materials.

## 2.1 Product group functions

The LED luminaries for road and street lighting (“products”) are lighting systems which use the LEDs (light emitting diodes) as the light source and are used for lighting of roads, streets and public venues. Such LED luminaries are usually turned on at night or after dark, and turned off after dawn. Typically, the LED luminaries have better energy efficiency and longer service life when compared with traditional luminaries used for the same purpose. The LED luminaries covered by this PCR refer only to the LED lighting systems used for lighting of roads, and exclude luminaires used for landscape lighting, tunnel lighting, flashlights, emergency lighting and other types of general and special purpose luminaires.

## 2.2 Product components

### Main components:

The product’s main components may include but not limited to the following:

- LED light-module
- Power driver(control-gear / power supply)
- Optical components (e.g., lenses and mirrors)
- Cooling module (e.g., metal heat sink)
- Fixture/fastener for fastening lamp to the lamp post
- SPD lightning strike protector
- Electronic parts (e.g., terminal blocks and electrical wiring)
- Other mechanical parts (e.g., plastic parts, glass parts, metal parts or parts of other materials)

### Secondary components

The product’s secondary components may include but not limited to the following:

- Street light controller (e.g., street light controller combined with intelligent lighting control system, can be used for on-off switching or dimming control)
- solar module and battery module

**Packaging materials:** For example, plastic wrapping films, paper boxes, and pallets.

## 2.3 Product technical description

The product technical description part of the EPD may include but not limited to the following information:

- Rated input voltage (unit: V (volt))
- Rated input power (unit: W (watt))
- Power factor
- Rated luminous flux (unit: lm)
- Correlated color temperature (unit: K)
- Rated luminous efficacy (unit: lm/W)
- Color rendering index (unit: Ra)
- Dustproof and waterproof rating (IPXX)
- Luminaire type (Cut-off type, Semi Cut-off type, Cut-off free type)

## 2.4 Product lifetime

Product design life: As defined and tested under conditions specified in Technical Requirements LED Road and Street Luminaires Installed in Taiwan, and DLC® Technical Requirements of the U.S. DesignLights Consortium, the products are considered to have a service life of five (5) years.

## 3. List of materials and chemical substances

The contents of the following materials and substances in the product shall be declared:

- All materials of the product (excluding packaging material) with weight ratio (material weight/product weight (excluding packaging))  $\geq 1\%$ ;
- All materials of the packaging with weight ratio (material weight/packaging weight)  $\geq 1\%$ ;
- All substances/materials in the product restricted/regulated by legal and customer requirements, such as flame retardants, lead content in solders, lead and flame retardants in solder flux, and substances regulated by EU's RoHS Directive (latest edition).

The declaration of no/low halogen content, no-lead solder, or no RoHS-regulated substances may only be made when appropriate evidences are available (for example, test reports from accredited laboratories/testing facilities). The following organizations may provide accreditation for testing facilities: Taiwan Accreditation Foundation (TAF), (Asia Pacific Laboratory Accreditation Cooperation (APLAC), International Laboratory Accreditation Cooperation (ILAC) or ILAC Mutual Recognition Arrangement (ILAC MRA). For definitions of testing methodology and confirmations of regulated hazardous substances based on the accredited laboratories' product testing methods, please refer to IEC 62321/CNS 15050 Standard.

#### 4. Declared unit or functional unit

The declared unit is one (1) piece of LED Luminaires for road and street lighting (“product”), with the product’s rated luminous flux, rated power, power factor, rated luminous–efficacy, and waterproof rating indicated for ease of comparison. The reason for adopting this unit is that the product is sold and marketed in this unit.

#### 5. System boundaries

The main system boundaries for the declared product system are presented as follows:

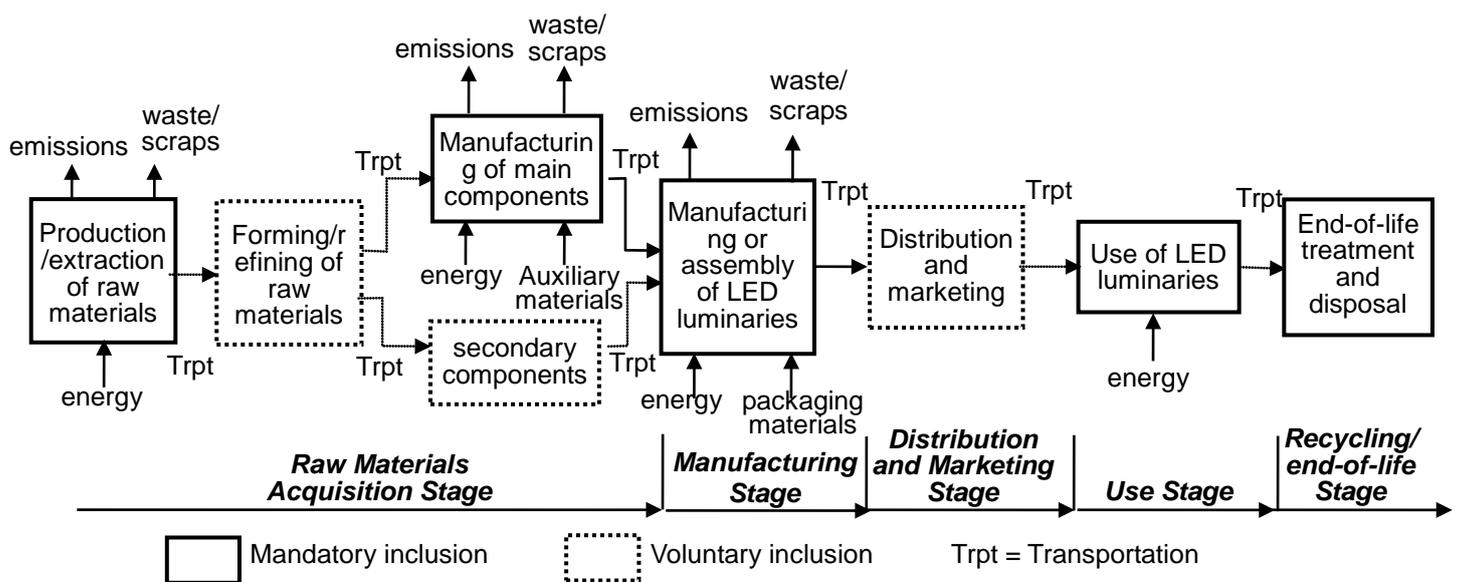


Figure 1 System boundary of the product system

As noted in Figure 1 above, the life cycle of an LED Luminaires for road and street lighting (“product”) covers five life cycle stages: raw material acquisition, product manufacturing, distribution and marketing, product use and recycling/end-of-life. The system boundaries and required information for the various life cycle stages are described as follows.

### **Raw Materials Acquisition Stage**

The LCA shall include information for the following unit processes related to main and secondary components and packaging materials:

- Raw material extraction and production;
- Production/generation of energy used for raw material manufacturing;
- Inputs and outputs related to manufacturing processes;
- Transportation to the product assembly plant;
- Transportation of process waste to the next stage facilities.

The inclusion in the LCA the information on the forming and refining of raw materials, manufacturing of secondary components and transportation of raw materials are optional (voluntary).

### **Manufacturing Stage**

The LCA shall include information for the following unit processes:

- Inputs and outputs related to product assembly and manufacturing processes;
- Transportation of process waste to the next stage facilities.

The data quality requirements for the main components are described in Section 9 on calculation rules and data quality requirements. Data related to the minor/secondary components shall also be included in the EPD, but their data quality requirements are different from those of the main components.

### **Distribution and Marketing Stage**

The LCA shall include information for the following unit processes:

- Transportation of products to the distribution sites or customer designated locations.

Inventory and reporting of distributors' operations and transportation from sales/distribution sites to users is optional (voluntary).

## **Use Stage**

The electricity consumption of the product during the use stage can be calculated based on the lamp's power consumption (W) specified in the product specification and time used (hr), using the following equation:

$$\text{Total electricity consumption (kWh)} = [\text{Rated input power (W)/Power Factor}] \div 1000 \times 4380 \text{ (hr)} \times 5 \text{ yr product life}$$

As the length of time of product use stated on the product specification may be different for each product, in order to compare products on the same basis, it is recommended to use the information provided by the *Project on Energy Conservation through Installation of LED Lamps* as implemented by ITRI. This project recommended the following product usage assumptions: daily usage of 12 hours for 365 days each year, equivalent for 4,380 hours of product use each year, for calculation of annual power consumption.

## **Recycling/end-of-life Stage**

- Reporting of recycling information (such as recycling and dis-assembly report or information on recycling channels) is mandatory in the EPD; the environmental impact shall be calculated based on the declared recycling rate;
- Inventory and reporting of transportation of end-of-life products to recycler or waste management sites is mandatory;
- If there are potential recycling benefits associated with the recycler's recycling technologies or recycling approach, information related to such benefits shall be provided in the EPD.

### **5.1 Specification of different boundary settings**

#### **Boundary in time**

The validity period for the LCA results presented in the LCA report shall be defined.

## **Boundary towards nature**

If the manufacturing processes are located within Taiwan, the solid waste categories as defined in Taiwan's Waste Disposal Act shall be adopted. If the processes are located in other countries, equivalent legal requirements shall be considered.

The natural boundary of the system shall describe the boundary where the materials and energy resources flow from nature into the system, and where the water and air emissions and waste are released out of the system.

Only the quantity of the disposed waste needs to be considered; the landfilling process does not need to be considered. If the waste is generated through wastewater treatment or incineration process, such waste should be included into the wastewater treatment or incineration process.

## **Boundaries in the life cycle**

The boundaries in the product life cycle are described in Figure 1. The construction of the site and infrastructure, as well as the production of manufacturing equipment and activities of site operators do not need to be included.

## **Boundaries towards other technical systems**

Boundaries towards other technical systems describe the inputs of material and other components towards other systems, as well as outputs of materials towards other systems. For the inputs of recycled materials and energy towards the product manufacturing stage, the transportation between the recycling process and use of recycled materials shall be included in the data set. For the production of recyclable products during the manufacturing stage, the transportation towards the recycling process shall be included.

*(Note: Further explanations are provided in Section 7 on open-loop recycling.)*

## **Boundaries regarding geographical coverage**

The manufacturing stage may cover manufacturing processes located on any sites around the world. For processes located in a specific region, the data used should be representative of the region. The data for the main constituents shall be the specific regional data for the

region where the process takes place (see Section 9). For ease of comparison, no matter where the emissions are generated, the same environmental impact parameters should be used for life cycle impact assessment (see Section 10).

## 6. Cut-off rules

For any impact category, if the sum of various impacts from a specific process/activity is less than 1% of the impact equivalent in that category, such a process/activity may be neglected during the inventory analysis. Nonetheless, the accumulated impact of neglected process/activity may not exceed 5%. That is, at least 95% of the potential life cycle emissions shall be evaluated. Components and materials omitted from the LCA shall be documented.

(Note: This judgment for this “1% Rule” is based on the environment relevance assessment of material input to the system, and does not consider special and exceptional environmental impacts.)

## 7. Allocation rules

The main allocation rules shall be valid for the entire product system. For other secondary processes, other allocation rules may be defined; however, the use of these rules should be justified. Product-specific information should be preferentially collected in order to avoid the need for allocation. While selecting allocation rules, the following principles are recommended.

- **Multi-output:** The allocations are based on the changes in the resource consumption and pollutant emissions (for example, adopted quantity allocation for some main component, or surface allocation for some components), following the changes in the studied system’s output product or function or economical relationship.
- **Multi-input:** The allocation is based on actual relationship. For example, the manufacturing process’s emissions may be affected by the change in waste flow input.
- **Open loop recycling:** For the input of recycled materials or energy during the manufacturing stage of the product system, the transportation between the recycling process and the recycling to material use shall be included in the dataset. For the

product which shall be recycled during the manufacturing stage, the transportation towards the recycling process shall be included.

*(Notes: - Allocation may be avoided through avoidance of dividing processes, for example as described in Section 6.3 of ISO/TR 14049; or through expansion of system boundary (for example as described in Section 6.4), so that the amended system shares the same product exchanges as the original system.)*

## 8. Units

The base units and derived units of the International System of Units (SI, *Système International d'unités*) shall be used preferentially.

### Power & energy units:

- power unit: W
- energy unit: J

### Specification units:

- length unit: m
- capacity unit: m<sup>3</sup>
- area unit: m<sup>2</sup>
- weight unit: kg

### Optical unit:

- Luminous flux unit: lm

### If necessary, prefixes may be used before the SI units:

- 10<sup>9</sup> = giga, symbol "G"
- 10<sup>6</sup> = mega, symbol "M"
- 10<sup>3</sup> = kilo, symbol "k"
- 10<sup>-2</sup> = centi, symbol "c"
- 10<sup>-3</sup> = milli, symbol "m"
- 10<sup>-6</sup> = micro, symbol "μ"
- 10<sup>-9</sup> = nano, symbol "n"

## 9. Calculation rules and data quality requirements

### Data quality requirements for the raw material acquisition stage

- Generic data may be used for the extraction, production, forming and refining of main, secondary and packaging materials used for the products. Please refer to Appendix I for the common sources of generic data. The year of the data cannot be older than 2000.

### Data quality requirements for the manufacturing stage

- Site specific data (for example, specific data for manufacturing plant or transportation) shall be used for the manufacturing and assembly of the product.
- When generic data are used, the equivalence between the chemical and/or physical process or at least the same technical range of referred systems shall be considered. Moreover, it is also recommended to consider the date or geographic aspects of the data quality when feasible.
- Generic data may also be used when contract manufacturers refuse to provide specific data, or when even if generic data are used in place of specific data, there is only minor impact to the results. The general rule is that if generic data are used in place of specific data, their combined contribution for all life cycle stages shall not be greater than 20% of total impacts for each impact category. However, there may be certain exception to specific products, and such exceptions shall be explained.
- The data shall be representative for the average of a specific year. If the average data for a specific year cannot be obtained, average data for a specific time period may be used. However, the selected specific time period should be representative, and the reason for using such data shall be provided.
- The electricity mix for the manufacturing stage should be site specific data. If site specific data cannot be obtained, the official electricity mix for the country where the site is located may be used as approximate value. The electricity mix should be documented.
- For the definition of hazardous waste, the definition as defined in Taiwan's Waste Disposal Act shall be used for sites located in Taiwan. For sites located outside Taiwan, legal requirements for the host country shall be observed.
- For the transportation of main components/materials to the manufacturing plant, the

actual transportation modes used and distance traveled shall be considered.

Note: For purpose of inventory and declaration of product carbon footprint, where the organization implementing this PCR does not contribute 10% or more to the upstream GHG emissions of the product or input prior to its provision to another organization or the end-user, the primary activity data requirement shall apply to the emissions arising from those processes owned, operated or controlled by the first upstream supplier that does contribute 10% or more to the upstream GHG emissions of the product or input.

#### **Data quality requirements for the distribution and marketing stage**

- For transportation of products to the downstream distributors/retailers, the actual mode of transportation and distance traveled shall be considered.
- The inputs of energy and resource, and the outputs of waste during the distribution and marketing stage shall be considered.

#### **Date quality requirements for the use stage**

- The energy consumption during the product use stage scenario shall be included.
- The energy consumption of the product shall be determined based on testing methodology stipulated in applicable international, national or industrial standards of the countries or regions the product is marketed.
- For the electricity mix for the use stage, the official electricity mix for the country where the product is exported may be used as approximate value or generic data. Please refer to Appendix I for the common sources of generic data. The year of the data cannot be older than 2000.

#### **Date quality requirements for the recycling/end-of-life stage**

- For transportation of end-of-life product as post-consumer waste for delivery to processors or recyclers, the data from national or industry sources or consumer behavior surveys can be used. When such data cannot be obtained, evaluation based on assumed scenario can be made, and the assumptions for such a scenario shall be reported in the EPD.
- Generic data may be used during the recycling/end-of-life stage, if for specific reason the site specific data for the recycling/waste disposal system cannot be

obtained. Then generic data and recycling rate may be used to calculate environmental impact. Please refer to Appendix I for the common sources of generic data.

## 10. Parameters to be declared in the EPD

The following parameters shall be declared in the EPD:

### Resource use

- non-renewable resources
  - materials resources
  - energy resources (used for energy conversion purposes)
- renewable resources
  - material resources
  - energy resources (used for energy conversion purposes)
- secondary resources
  - material resources (pre-consumer or post-consumer recycling and reuse)
  - energy resources (used for energy conversion purposes)
- recovered energy flows (such as thermal energy) expressed in MJ
- water resource use indicators shall also be calculated from the life cycle inventory. These indicators do not constitute a “water footprint” as potential environmental impacts due to the water use in different geographical locations is not captured. The minimum indicators for water resource use in the EPD shall be:
  - total amount of water (consider make-up water for in-plant recycling and reuse)
  - direct amount of water used by the core process
- The following requirements for the water resource use indicators apply (in part adopted from water footprint inventory in *ISO 14046 Environmental management - Water footprint - Principles, requirements and guidelines*):

- water use includes evaporation, transpiration, product integration, release into different drainage basins or the sea, displacement of water from one water resource type to another water resource type within a drainage basin (e.g. from groundwater to surface water). In-stream water use is not included.
- for water used in closed loop processes (such as cooling system) and in power generation only the net water consumption (such as reintegrations of water losses) should be considered.
- sea water shall not be included in the indicator.
- tap water or treated water (e.g. from a water treatment plant), or waste water that is not directly released in the environment (e.g. sent to a wastewater treatment plant) are not elementary water flows, but intermediate flows from a process within the technosphere.
- additional transparency in terms of geographical location, type of water resource (e.g., groundwater, surface water).

**The following requirements on the resource declaration shall also apply:**

- all parameters for resource consumption shall be expressed in mass, with the exception of renewable energy; resources used for the generation of hydroelectric, wind electricity and solar energy, which shall be expressed in MJ;
- all parameters shall not be aggregated but reported separately. Resources which contribute for less than 5% in each category shall be included in the resources list as “other”;
- nuclear power shall be reported among the non-renewable energy resources as kg of uranium calculated by converting the thermal energy (MJ) considering a reactor of III generation with an efficiency of 33%;
- the PCR can define other resources (for example rare materials originating from the LCI data) which may be listed and detailed in the EPD for each specific product category;
- the energy content of some products (such as paper or plastic based products) is useful information for the end of life management. For this reason, the “energy content of product” shall be declared in MJ: its estimation shall be made considering the gross calorific value of the product. Only the energy that is suitable for an eventual energy recovery at the end of life shall be considered (energy content of steel due to

its carbon content, for example, shall not be considered since it is not practically recoverable);

- energy content of biomass used for feed or food purposes shall not be considered.

### **Impact equivalents expressed as potential environmental impacts**

The potential environmental impacts associated with the various types of use of resources and pollutant emissions shall be reported into the following impact categories:

- Emission of greenhouse gases (expressed as the sum of global warming potential, GWP, 100 years, in CO<sub>2</sub> equivalents).
- Emission of acidifying gases (expressed as the sum of acidifying potential in sulphur dioxide (SO<sub>2</sub>) equivalents).
- Emission of gases that contribute to the creation of ground-level ozone (expressed as the sum of ozone-creating potential, ethene-equivalents).
- Emission of substances to water contributing to oxygen depletion (expressed as phosphate (PO<sub>4</sub><sup>3-</sup>) equivalents).

### **Impacts category for optional (voluntary) declaration**

In accordance with the LCA results of this product category, other categories of impacts with significance may also be declared. For example, consumption of water resource (expressed as m<sup>3</sup> of water consumed), emission of ozone-depleting gases (expressed as the sum of ozone-depleting potential in mass of CFC<sub>11</sub>-equivalents, 20 years), change in land use and resulting change in production, and depletion of non-biological resources.

Note: For characterization factors of each impact category, please refer to *EPD General Programme Instructions, Version 2.5 (2015-5-11)*.

### **Resource Recycling and Waste**

- hazardous waste (as defined in waste management laws of the country where the waste is generated);
- Recyclable resources or materials (optional information)
- Pre-consumer recyclable materials (optional information)

Note: For characterization factors of each impact category, please refer to *EPD General Programme, Version 2.5 (2015-5-11)*.

## **11. Recycling information**

The recycling information shall include information such as dis-assembly instructions, which parts/components are suitable for recycling (such as metal cases) or not suitable for recycling. For example, the information which the EU WEEE Directive requires the end product manufacturer to provide may also be included in the declaration information for products.

If practical, information for the parts which cannot be recycled and reused, and therefore should be disposed of properly during the end-of-life stage may also be included.

## **12. Other environmental information (Optional)**

The EPD may cover information including technology adopted, site of product manufacturing and assembly, as well as information on other working environment, health and risk-related aspects.

If this PCR is intended to be used for product carbon footprint declaration purpose, in the declaration, information regarding commitment on GHG reduction should be included and shall ensure that the commitment is measurable, reportable and verifiable. The organization may also list environmental and energy management related information, such as awards, commendations and system certifications (e.g., ISO 14001, ISO 14064-1, IECQ HSPM), etc.

### 13. Information about the certification

The information on PCR review, EPD verification and verification organization shall be included.

EPD Certification is valid until 20XX-__-__	
It is in accordance with the Requirements for the international EPD system, <i>General Programme Instructions, Version 2.5 (2015-05-11) – www.environdec.com.</i>	
The PCR review for _____ (PCR 2017: ) was administered by the Environment and Development Foundation and carried out by an LCA expert panel chaired by Dr. Wen-Ching Chen (wenc@edf.org.tw).	
Independent verification of the declaration, according to ISO 14025:2006	
<input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
Third party verifier: Environment and Development Foundation in Taiwan.	
Accredited by :	
Name:	
Title:	
Organization:	Signature: _____
Name:	
Title:	
Organization:	Signature: _____
Name:	
Title:	
Organization:	Signature: _____
Environmental declarations from different programmes may not be comparable.	

## 14. References

The EPD established in accordance with this PCR shall refer to the following documents:

- EPD General Programme Instructions, Version 2.5 (2015-05-11), downloadable from: <http://www.environdec.com/en/The-International-EPD-System/General-Programme-Instructions/>
- PCR documents of relevance to product declaration
- The underlying LCA report
- ISO 14040, “Environmental management - Life cycle assessment - Principles and framework”, second edition (2006-07-01)
- ISO 14044, “Environmental management - Life cycle assessment - Requirements and guidelines”, first edition (2006-07-01)
- Development of UN’s Central Product Classification (CPC), from the website of National Statistics of the Republic of China (Taiwan)
- Central Product Classification (CPC), Version 2.1 (2015-08)
- Technical specifications for high-performance LED luminaries for road and street lighting, Bureau of Standards, Metrology and Inspection (BSMI), MOEA (2016)
- DLC® Technical Requirements Version 4.2, 2017-04-28

When available, the following documents shall also be referenced:

- Other documents and recycling instructions that verify and complement the EPD.

## Appendix I – Generic Data Sources to Refer to

For processes located within Taiwan, Taiwan generic data or the data published by the commercial, industrial and energy competent authorities of the Republic of China (ROC) government, may be used. However, for other regions (such as EU), if there are more relevant generic data available, these data should be used instead. Data from the following generic databases are recommended for use.

<b>Material</b>	<b>Database</b>	<b>Published</b>
Industrial processes	ecoinvent 3.3	2016
Packing materials, transport, Waste treatments	BUWAL 250, 2 <sup>nd</sup> edition	2004
Steel, Primary copper, Copper products, Electricity, Fuels, Aluminum, Chemicals, Transports, Waste management	ecoinvent 3.3	2016
	PE-GaBi 14	2014
	ELCD version 3.2	1995-2014
	The Boustead Model 6.0	2013
	EIME (Environmental Information and Management Explorer) EcoBilan	1999-2014
Plastics	PE Plastics Europe (Association of Plastics Manufacturers in Europe)	1993-2016
	PE-GaBi 14	2014
	ELCD version 3.2	1995-2014
	ecoinvent 3.3	2016
	The Boustead Model 6.0	2013
	EIME (Environmental Information and Management Explorer) EcoBilan	1999-2014
Electronic components	PE-GaBi 14	2014
	ELCD version 3.2	1995-2014
	ecoinvent 3.3	2016
	The Boustead Model 6.0	2013
	EIME (Environmental Information and Management Explorer) EcoBilan	1999-2014
LCA Database in Taiwan	<a href="#">Carbon Footprint Calculation Platform</a>	2017
	<a href="#">DoITPro</a>	2017

## **Appendix II – Reporting Format for the EPD**

This appendix provides guidance information for the titles of sections, types of data and required information to be reported in the mandatory reporting part of the EPD. As a generic reporting template, the following titles and sub-titles are recommended:

*(Refer to the PCR manual for the section numbering, the information in Italics are the recommended data/information for inclusion)*

### **Introductory part**

Each EPD should have an introduction part on the top part of the EPD which includes the following information:

- *Company/organization name*
- *Product name*
- *EPD registration number*

### **Description of the company/organization and product/service**

#### ***Company/Organization***

- *Description of company/organization*
- *Description of overall working environment, existing quality system and environmental management system*

#### ***Product and services (see Section 2)***

- *Product's main applications*
- *Description of product specification, manufacturing process, manufacturing sites (if there are several sites)*
- *For product's environmental performance aspects, characteristics which may improve the usefulness of product*
- *Other types of relevant information, for example, special manufacturing processes with special advantages to the environment*

## **List of materials and chemical substances**

- *Content declaration (see Section 3)*

## **Presentation of the environmental performance**

- *Outline of the LCA methodology, for example, period of LCA, declared units, system boundaries (graphical presentation), cut-off and allocation rules, and data sources. (see Section 5~10)*

### ***Raw Materials acquisition stage***

### ***Manufacturing stage***

### ***Distribution, Use and End-of-Life stage***

- *Geographical area where the product is delivered*
- *Transport data*
- *Design life*
- *Description of state of usage and energy consumption*
- *Annual power consumption and annual global warming potential*
- *End of life information*

## **Information about Company and Certification Organization**

### ***Recycling information (see Section 11)***

### ***Other environmental information (see Section 12)***

### ***Information regarding certification (see Section 13)***

- *Names of certification and verification organizations*
- *Validity of certification certificates*
- *Compliance with legal and relevant requirements*

### ***References (see Section 14)***

- *relevant PCR documents*

- *EPD General Programme Instructions, Version 2.5 (2015-05-11)*
- *underlying LCA study*
- *other supporting documents for LCA information*
- *other relevant documents regarding company/organization's environmental activities*

## Appendix III Abbreviations

Acronyms	Common Name
APLAC	Asia Laboratory Accreditation Cooperation
CFP	Carbon Footprint of Product
EPD	Environmental Product Declaration
ErP	Energy Related Product
ILAC	International Laboratory Accreditation Cooperation
ILAC MAR	International Laboratory Accreditation Cooperation Mutual Recognition Arrangement
ISO	International Organization for Standardization
LCA	Life Cycle Assessment
PCR	Product Category Rule
RoHS	The Restriction of the use of certain Hazardous Substances in electrical and electronic equipment
SPI	Society of the Plastics Industry
TAF	Taiwan Accreditation Foundation
TEC	Typical Energy Consumption
Trpt	Transportation
WEEE	The Waste Electrical and Electronic Equipment Directive